


GRAVELPAVE2 DETAIL

Choose This Product For Reinforcing Gravel Wearing Surfaces



PLAN

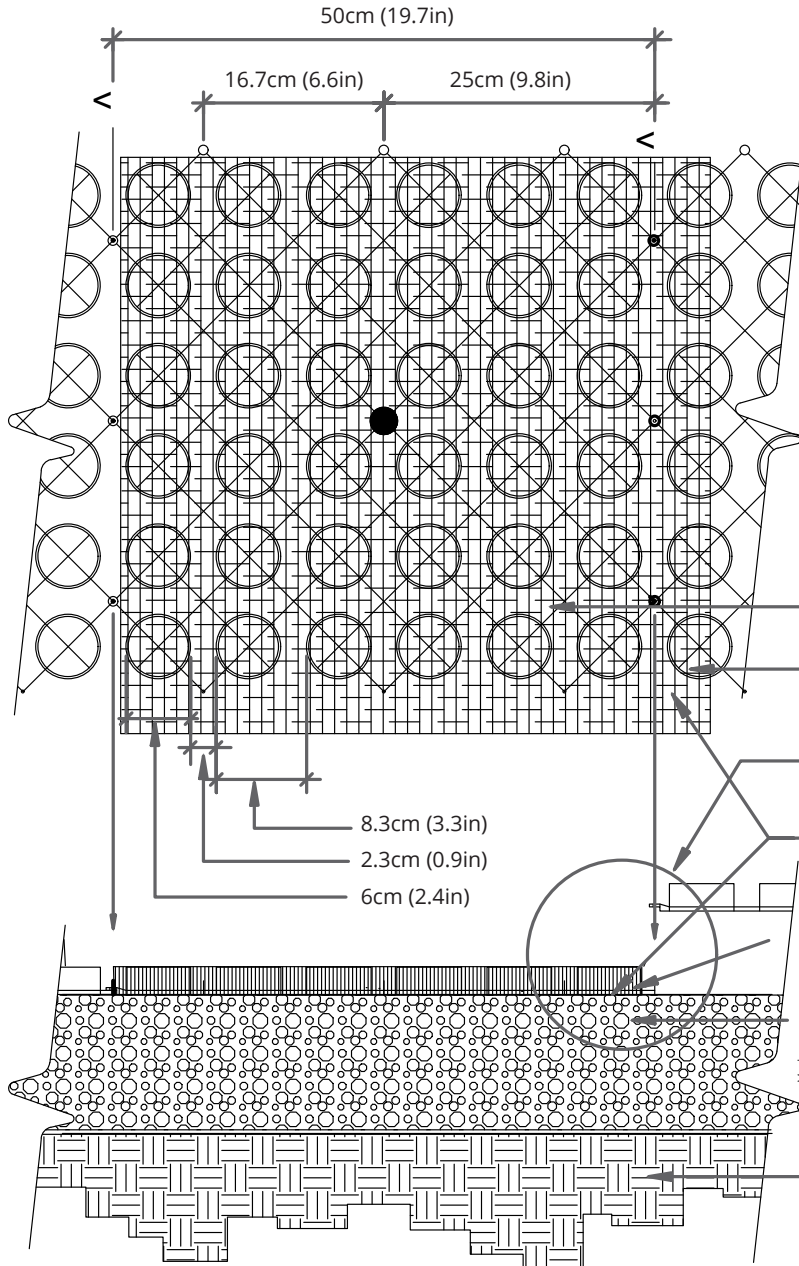

SPECIFICATIONS

UNITS

Unit Size - 1m X 1m X 2.5cm (40in X 40in X 1in)
 Available in 2 standard roll sizes
 1010 Roll - 3.3 ft x 32.8 ft - 108 sq.ft.
 2020 Roll - 6.6 ft x 65.6 ft - 430 sq. ft.
 Unit Weight - 538 g (19 oz) or 2.2. kg (4.8 lbs)
 Strength - 1121 kg/sq.cm (15,940 PSI)
 Colors - Black (standard), Granite, Grey, Tan, Terra Cotta
 Resin - 100% Post-Consumer recycled HDPE

FABRIC

Weight - 1.4 to 1.7 oz/sq.y (47-58 gm/sq.m)
 Tensile - 120 lb/sq.ft (585 kg/sq.m)
 Flow - 275 gal/min/sq.ft (11,200 l/min/sq.m)

Gravelpave2

Adjacent Gravelpave2

See enlargement below


Filter fabric attached to bottom of Gravelpave2

Gravelpave2 filled with 3/16in to 3/8in angular gravel, uniform size, washed

Varies As per loading requirements
 - Compacted sandy gravel road base
 - 95% modified proctor density
 - See full technical specifications for composition

Compacted subgrade

SECTION

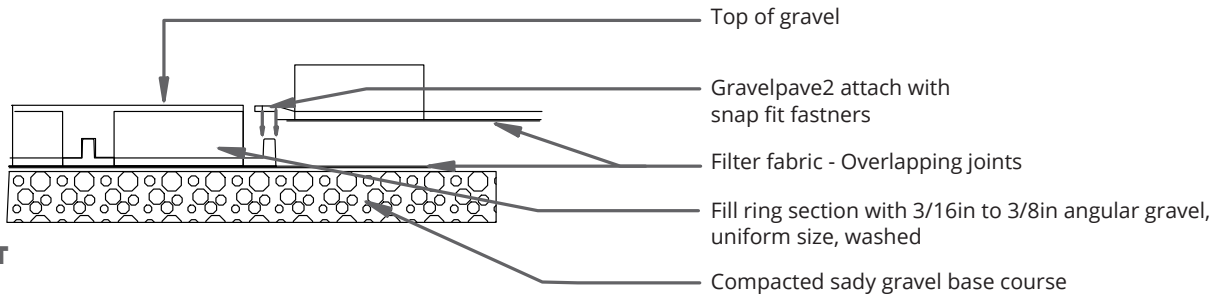

ENLARGEMENT

InvisibleStructures.com



303-233-8383